TOSHIBA

xd2000

Originals are detected by design and brilliance.

- Attractive design
- High security (password function and panellock)
- Easy set-up and "easy to use"

3LCD

LCD stands for
Liquid Cristal Display

TOSHIBA

xd2000

Immerse yourself in a world of colour.

Display 0,61" LCD Chip
Resolution XGA 1,024 x 768
Brightness 2,000 ANSI-lumens
Colour reproduction 16.7 mio. colours
Contrast 600 : 1
Projection format 4 : 3 switchable to 16 : 9
Lamp 180 W (TLPLW11LAMP)
Max. lamp life up to max. 2,000 hours/ um to max. 3.000 hours in ECO mode
Lens F = 1.6 - 1.89 / f = 18.6 - 22.3 mm, manual zoom and focus
Zoom 1.2 x
Frequency (hor./vertical) 16 - 106 kHz / 50 - 85 Hz
Projection front, rear and ceiling
Digital keystone correction auto vertikal +/- 30°
Picture size (diagonal) 0.84 m – 7.62 m
Projection distance 1.19 m – 9.13 m
Input signals NTSC / PAL / SECAM, 480i, 480p, 576i, 576p, 720p, 1,080i, VGA / SVGA, XGA / SXGA / UXGA (compr.)
Inputs RGB (D-sub 15), S-video, composite video (1 x RCA), RGB audio (stereo mini jack), video / S-video audio (1 x RCA L/R)
Outputs RGB (D-sub 15), audio (stereo mini jack)
Serial interface RS-232C (mini DIN8 pin)
Power supply AC 100 - 240 V, 50 / 60 Hz
Loudspeaker 1 W mono
Dimensions (W x H x D) 288 x 92 x 247 mm
Weight 2.8 kg
Operation noise standard 34 dB / ECO mode 29 dB
Specials security-function, user logo, password, panellock, quick start / instant shut down (5 sec.), black board-function
Accessories remote control with batteries, owners manual (CD ROM), quick reference, RGB and power cable, softcase
Options ceiling mounting, trolley, spare lamp, camera c001

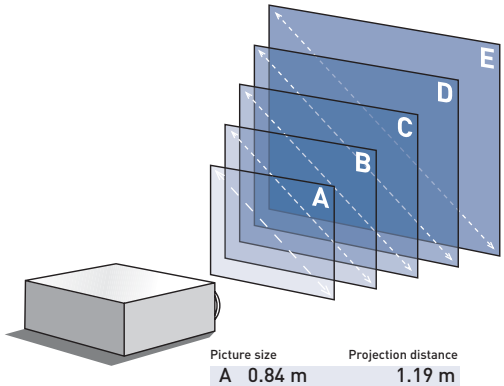

Picture size	Projection distance
A 0.84 m	1.19 m
B 1.52 m	1.8 - 2.18 m
C 2.54 m	3.02 - 3.64 m
D 5.08 m	6.08 - 7.31 m
E 7.62 m	9.13 m

August 2006 • Subject to modifications and errors

www.toshiba-europe.com/projectors

Toshiba Europe GmbH
Projection & Display Technology
Phone: ++49-2131-158-01 • Fax: ++49-2131-158-835
e-mail: projektoreninfo@toshiba-teg.com